



FT 8337


Designed to bond to a wide variety of substrates. It offers clean removability after short periods of time.

FEATURES:

- Polyester carrier
- Densified kraft liner
- Specially designed dual adhesive system

BENEFITS:

- Excellent slitting and die-cutting
- Removable adhesive on liner side, with a high tack permanent on the unwind side.
- Permanent adhesive is an excellent foam bonding adhesive

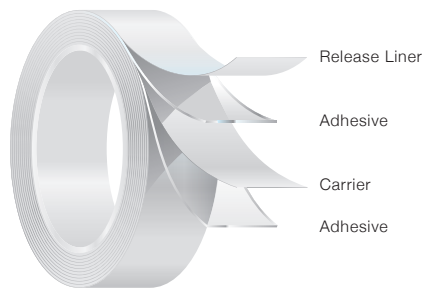

CONSTRUCTION:

Unwind Adhesive:
Rubber Based

Carrier:
Polyester

Liner Adhesive:
Rubber Based

Liner:
80 # Densified Kraft

FT 8337

Physical Properties		Typical Values		
THICKNESS		US Mils		MM's
Unwind Adhesive		1.9		0.04
Carrier		0.5		0.01
Liner Adhesive		0.8		0.02
Liner		4.6		0.12
Total		7.8		0.20
*PSTC-133				
PEEL ADHESION				
2 mil PET 180° 12" min Initial				
Substrate	Test Side	Lbf / in	US Oz / in	N / Meter
SS	Liner	2.7	43	473
	Unwind	7.1	114	1243
*PSTC-101, ASTM D-3330, STD-10				
LOOP TACK				
2 mil PET 20" min Initial				
Substrate	Test Side	Lbf / in	US Oz / in	N / Meter
SS	Liner	2.5	40	438
	Unwind	4.1	66	718
*PSTC-16, STD-7				
STATIC SHEAR				
2 mil PET 72°F / 22°C @ Initial 1" sq (6.5 cm ²) 5.5 lbs (2.5 kg)				
Substrate	Test Side	Min to Fail		
SS	Liner	> 150		
	Unwind	> 250		
*PSTC-107, ASTM D 3654, STD-9				
TEMPERATURES				
Min Application Temp		50°F		10°C
Max Continuous Operating Temp		125°F		52°C
Max Intermittent Operating Temp		150°F		66°C
*TEST METHODS				

Note: The listed values are typical only and not intended to serve as product specifications

APPLICATION TECHNIQUES

- It is essential with all pressure-sensitive tapes the application surface is clean, dry and free of grease and oil
- Bond strength is dependent upon the amount of adhesive-to-surface contact developed
- Note that different pressure, time and temperature on different (firm / rigid) surface achieves different performance

STORAGE AND SHELF LIFE

The shelf life of the product is one year when stored at 18-22°C / 64-72°F, 30-70% relative humidity and out of direct sunlight, in original packaging.

Please refer to Tapes.AveryDennison.com for complete terms and conditions, including warranty terms, relating to this product. You should periodically review the site as terms and conditions are subject to change without notice.

© 2013 Avery Dennison Corporation. All rights reserved. Avery Dennison® is a registered trademark of Avery Dennison Corporation. Avery™ and all other Avery Dennison brands, product names, antenna designs and codes or service programs are trademarks of Avery Dennison Corporation.



Performance
Tapes

Asia Pacific
Kunshan, China,
NO. 618 Nanhe Road
Kunshan Economic &
Technological Zone
China 215335
Phone: +86 512 57155001
Fax: +86 512 57155059

Europe
Tieblokkenlaan 1
B-2300 Turnhout
Belgium
Phone: +32 (0)14 40 48 11
Fax: +32 (0)14 40 48 55

South America
Rua Francisco Foga, 225
13280-000 Vinhedo
SP Brazil
Phone: +55 19 3876 7736
Fax: +55 19 3876 7682

North America
250 Chester Street
Painesville, Ohio
44077 USA
Phone: +1 866-462-8379
Fax: +1 888-358-4469

For more information on our bonding tapes and adhesive solutions, visit Tapes.AveryDennison.com